

Energy Storage Battery LV Series Flex-L4



KEY FEATURES



Ultra Safe

Intelligent fire extinguishing system




Long-term Warranty

10-year product warranty



Automatic Self-heating

-20°C~55°C operating temperature(optional)



Flexible Investing

Expandable to 5.12-76.8kWh
Compatible with major brand inverters



Wi-fi Connectivity


Built-in Wi-Fi,
supports APP OTA upgrade



IP65 Protection

Fearless of outdoor installation,
strong environmental adaptability

LV Series Flex-L4

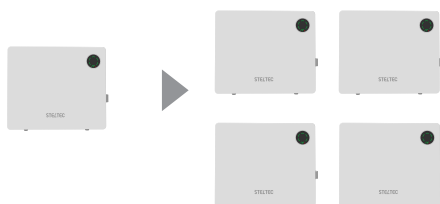


Max.15 modules in parallel

Maximum capacity of

76.8kWh

TECHNICAL PARAMETERS



Product Type	Flex-L4
Battery Model	STE-BWO-5120
Battery System Capacity	5.12kWh
Cell Technology	Li-ion(LFP)
Battery Cell Capacity	100Ah
Configuration	1P16S
Nominal Voltage	51.2V
Operating Voltage Range	45.6~56.2V
Dimension(W*D*H)	520*141.5*470(mm)
Net Weight	48kg
Scalability	Max. 15 systems in parallel operation
Installation	Wall mounted only
Depth of Discharge	90%
Charge/Discharge Current(Recommended)	50A
Charge/Discharge Current(Max)	100A
Cooling Method	Natural convection
Communication Port	RS232, RS485, CAN
Protection Class	IP65
Environment	Indoor or Outdoor Eaves
Charging Temperature	-20°C~55°C (with heating) 0°C~55°C (without heating)
Discharging Temperature	-20°C~55°C
Humidity	5%-95%
Max. Operating Altitude	2,500m
Wi-Fi Module	Built in Wi-Fi module, APP OTA function
Extended Functions	Thermal aerosol fire extinguishing device(standard) Heating system (optional)
Certificates	IEC62619 / IEC61000 / CE / UN38.3 / MSDS